

MC6C

802.11a/b/g/n WLAN Ethernet Client Adapter

Description:

The MC6C connects devices with Ethernet-Ports to Wireless LAN Networks. The most common application area for the MC6C is the broad area of industrial WLAN appliances of machine-to-machine communication. This includes mobile setups such as forklift trucks and driverless transport systems. The MC6C is offered as an integrateable module, so that customers can enhance their devices and machines with a Wireless LAN Interface.

Device Properties:

Hardware:

Processor Board with ARM® Cortex®-A9 Core

Memory: 128MByte DDR-RAM and 4GB Flash

802.11a/b/g/n for 2.4 + 5 GHz WLAN, Data Rate up to 300 MBit/s

1 x Gigabit LAN Port

Power Supply 10-56V or 5V (+- 10%) 5W max. 3W typ.

Optional Interfaces:

RS232 or TTL Serial Port (only Rx Tx)

USB 2.0 Port

Relay with changeover switch

CAN-Bus interface


Features:

Configuration via website or the MC-Config-Application


Different Bridge-Modes for LAN-Client-Connection:

- NAT
- Single Client NAT
- Single Client Cloning
- Level 2 Bridge
- MWLC Mode

Certificate Management for 801.1x authentication

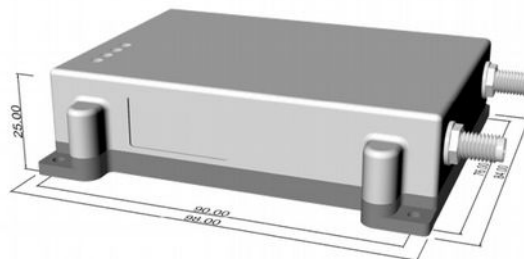

Also available in a housing

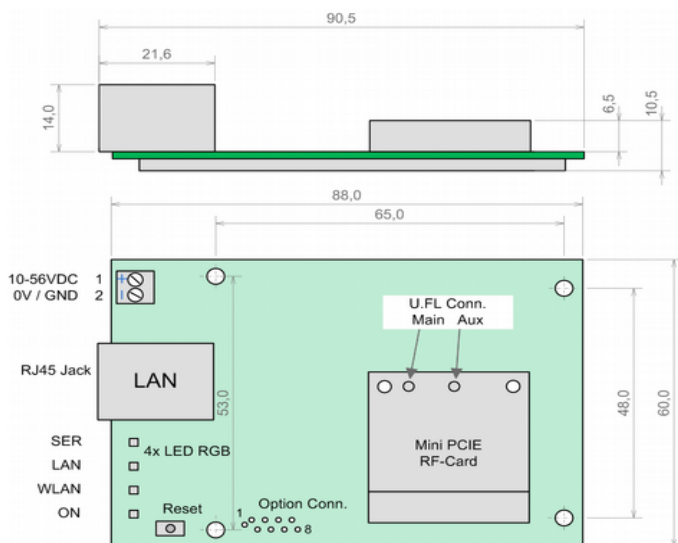

Technical specifications:

Specifications:	
Ethernet	1 x 10/100/1000 MBit Auto MDI/MDIX
Serial (optional)	RS232, 300-460,8 KBit/s, Tx D Rx D
USB (optional)	1 x USB 2.0
Antenna Connectors	2 x U.FL
Power Supply	10-56V DC, connection via 2pin screw terminal (optional 5V)
Energy	<= 5W (typically 3W)
Temperature	0-70°C
Dimensions	60 x 88 mm, max. 17mm in height
Weight	ca. 40g

Wireless LAN Interface:		
Technology	802.11 a/b/g/n WLAN (2.4 + 5 GHz band)	
Antennas	2 Antennas (2T2R MIMO)	
Encryption	WEP (64,128bit) + TKIP/AES	
Security	802.11i WPA - WPA2 - TKIP -- AES – PSK 802.1x EAP-PEAP, -TLS, -TTLS, -LEAP	
Roaming	Fast roaming 802.11r	
Channels	802.11b/g/n ETSI 1-13, USA/Canada 1-11 802.11a/n ETSI 19, USA/Canada 25 (U-NII-1 + UNII-2A + U-NII-2C+U-NII-3)	
Data Rates	Mode	Data Rate
	802.11b:	1, 2, 5.5, 11Mbps
	802.11g / a	6, 9, 12, 18, 24, 36, 48, 54Mbps
	802.11n (20MHz)	1Nss: max. 72.2Mbps 2Nss: max. 144.4Mbps
	802.11n (40MHz)	1Nss: max. 150Mbps 2Nss: max. 300Mbps

<i>Transmission Power</i>	<i>802.11b/g 17 dBm</i>	<i>802.11a 15 dBm</i>
	<i>802.11gn 16 dBm</i>	<i>802.11an 15 dBm</i>

Order codes:		
	Option	Code
<i>Standard</i>		<i>MC6C</i>
<i>Antenna cable</i>	<i>with RPSMA Pigtail 10cm</i>	<i>MC6C-...-1RSMA</i>
<i>Serial Interface</i>	<i>RS232 via Micro Match socket</i>	<i>MC6C-RS232-....</i>
	<i>TTL level via Micro Match socket</i>	<i>MC6C-SER-....</i>
<i>CAN-Bus</i>	<i>via Micro Match socket</i>	<i>MC6C-CAN-....</i>
<i>USB</i>	<i>USB Type A connector</i>	<i>MC6C-USB-....</i>
<i>Relay</i>	<i>Relay changeover switch</i>	<i>MC6C-REL-....</i>